


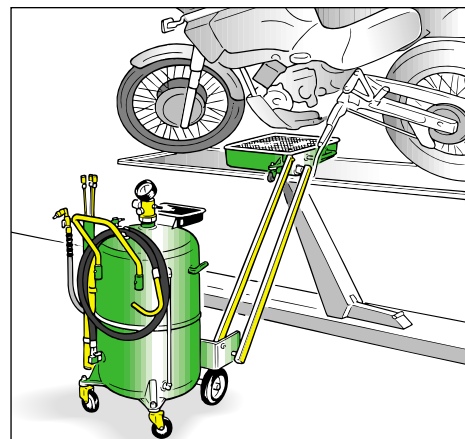

## PANTOGRAPH Series 65/14 lt

Art. 46064 **65lt**Art. 46065 **65lt**

Due to their versatility, these **pantograph oil suction/drainers** are universal drainers because they can be used to change the oil of all motor vehicles and motorcycles:

- **by gravity** with tank on floor
- **by gravity** with tank raised, with motor vehicles placed on auto lift or pit.
- **by suction** with probe inserted directly in the engine, and anywhere because they do not require continuous connection to the compressed-air line or to other energy sources.


(The oil must be hot 70/80° C).

**Art. 46064 Universal pantograph waste oil drainer** for motor vehicles and motor cycles with **65-litre** wheel-mounted tank equipped with level-gauge, without suction group and probes  
(See page 122)

N° 3 packing  $m^3$  0,247 kg 38,2


**Art. 46065 Universal pantograph oil drainer** for motor vehicles and motor cycles with **65-litre** wheel-mounted tank equipped with level-gauge supplied with series of probes art. 45560  
(See page 122)

N° 4 packing  $m^3$  0,310 kg 42,7

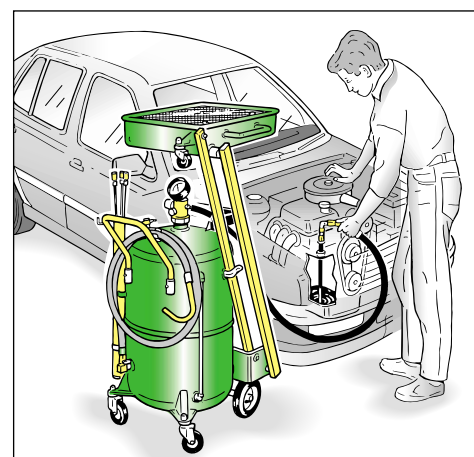

Article	46064	46065
Tank capacity	65 lt	65 lt
Max. draining capacity	52 lt	52 lt
Bowl capacity	14 lt	14 lt
Depressurizing pressure	/	7 bar
Depressurization time	/	2 min
Noise level	/	75 dB
Suction speed	/	1,5-2 lt/min
with oil at 70-80°C, probes 6 mm.		
Total suction capacity	/	43-45 lt
Suction hose	/	2 m
Draining hose	2 m	2 m
Max. discharge pressure	0,5 bar	0,5 bar

## Overall dimensions

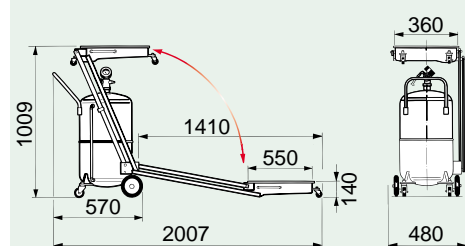

art. 46064-46065

**Important:** DO NOT drain brake fluids, fuels or flammable liquids of any kind, corrosive liquids.

