



with SUCTION TUBE 4 m
connections for INBOARD and OUTBOARD



Art. 43724 **24lt**



Art. 43760 **65lt**



Art. 43790 **90lt**



Art. 43765 **65lt**

Ideal for quickly changing (by probe) the oil of **boat motors**.

The functional characteristics (required for the intended use) differentiating them from the other drainers on pages 116-121, are: **4-metre hose and connections for inboard (art. 45551) outboard (art. 45550) motors**.

Art. 43724 Waste oil drainer with 24-litre wheel-mounted tank and 4-metre suction hose

N° 1 packing m^3 0,090 kg 13,7

Art. 43760 Waste oil drainer with 65-litre wheel-mounted tank and 4-metre suction hose

N° 2 packing m^3 0,230 kg 27,9

Art. 43765 Waste oil drainer with transparent chamber, 65-litre wheel-mounted tank and 4-metre suction hose

N° 2 packing m^3 0,230 kg 33,9

Art. 43790 Waste oil drainer with 90-litre wheel-mounted tank and 4-metre suction hose

N° 2 packing m^3 0,250 kg 32,4

Article	43724	43760	43765	43790
Tank capacity	24 lt	65 lt	65 lt	90 lt
Max. draining capacity	20 lt	52 lt	52 lt	75 lt
Chamber capacity	/	/	8 lt	/
Depressurizing pressure	7 bar	7 bar	7 bar	7 bar
Depressurization time	1-1,5 min	2 min	2 min	2,5-3 min
Noise level	75 dB	75 dB	75 dB	75 dB
Suction speed with oil at 70-80°C, probes 6 mm.	1,5-2 lt/min	1,5-2 lt/min	1,5-2 lt/min	1,5-2 lt/min
Total suction capacity	15-16 lt	43-45 lt	43-45 lt	60-65 lt
Suction hose	4 m	4 m	4 m	4 m
Draining hose	/	2 m	2 m	2 m
Max. discharge pressure	manual	0,5 bar	0,5 bar	0,5 bar

Overall dimensions

Art.43724: for characteristics and dimensions as per art. 43024 see page 116

Art.43760: for characteristics and dimensions as per art. 43060 see page 118

Art.43765: for characteristics and dimensions as per art. 43065 see page 120

Art.43790: for characteristics and dimensions as per art. 43090 see page 118


Art.45550-45551: for characteristics and dimensions see page 123

Important: DO NOT drain brake fluids, fuels or flammable liquids of any kind, corrosive liquids.





SUCTION STAGE WITH CONNECTION art. 45550 TO AN OUTBOARD ENGINE

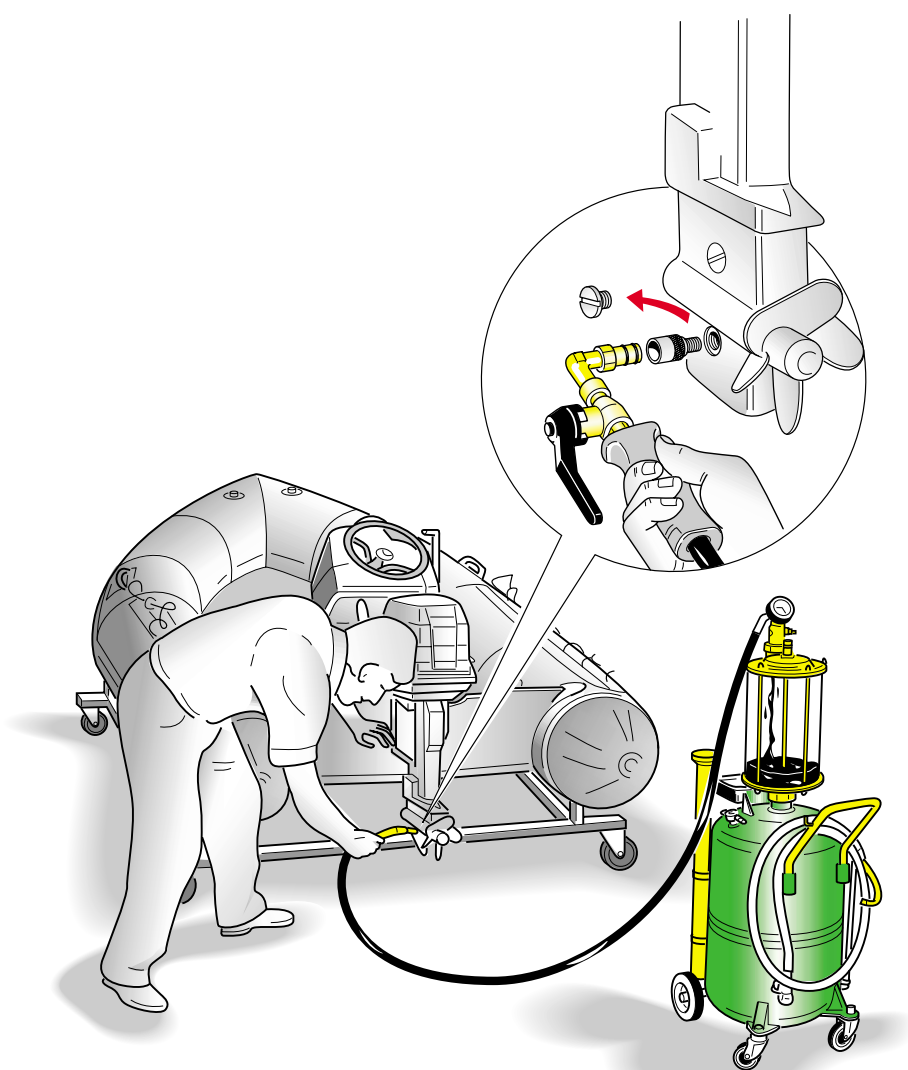



SUCTION STAGE WITH CONNECTION art. 45551 TO AN INBOARD ENGINE WITH INCORPORATED PROBE

